


McKissick® 750 Easy-Lift® Overhead Bridge Crane Blocks



McKISSICK®
Your Total Block Company.



www.thecrosbygroup.com

**theCrosby[®]group,
INC.**

Product Information

- Wide range of sizes available.**

751 - Single Sheave Version

- **Working Load Limits:**
2, 3, 5, 7.5 & 10 Metric Tonnes
- **Sheave Sizes: 6.5" to 14"**
165mm to 356mm
- **Wire Line Sizes: 1/4" to 1"**
6mm to 26mm

- Design Factor of 5 to 1**

Product Information

- Wide range of sizes available.**

752 - Double Sheave Version

- **Working Load Limits:**
3, 5, 7.5, 10 & 15 Metric Tonnes
- **Sheave Sizes: 6.5" to 12"**
165mm to 305mm
- **Wire Line Sizes: 1/4" to 3/4"**
6mm to 19mm
- **Sheave Spacing: 3.25" – 11.00"**
82.6mm to 279mm

- Design Factor of 5 to 1**

Product Information

RFID EQUIPPED

- Each bridge crane block comes “factory equipped” with an RFID chip for immediate utilization with various inspection and asset management software.



Product Information

- ☑ All single point shank hooks are genuine Crosby[®].
- Forged alloy steel
- Quenched and Tempered
- Contain the patented QUIC-CHECK[®] markings.



“World Class” latch
that integrates into
hook tip.



Product Information

- Sheaves are furnished with deep groove ball bearings.**
 - **Bearing life and Design Factors meet:**
 - ASME HST-4, Class H4 - CMAA 70 Class D
 - **Bearings are maintenance free and sealed for life (10,000 hrs.).**

- Hooks are furnished with ball bearings.**

750 Easy-Lift[®] Bridge Crane Blocks

Product Information

- ✓ Sheave pitch diameter is a minimum of 16 times the rope diameter on standard wire line sizes.

See yellow boxes below

Model 751 - Single Sheave										
WLL (t)	2		3		5		7.5		10	
Sheave O.D.	6.5"	165mm	8"	203mm	10"	254mm	12"	305mm	14"	356mm
Pitch Diameter	5.69"	151mm	7.38"	187mm	9.25"	235mm	11"	279mm	12.5"	318mm
Wire Line*										
1/4" 6.5mm										
5/16" 8mm										
3/8" 9-10mm										
7/16" 11mm										
1/2" 12-13mm										
9/16" 14mm										
5/8" 16mm										
3/4" 19mm										
7/8" 22mm										
1" 25-26mm										

750 Easy-Lift® Bridge Crane Blocks

Product Information

- ✓ Sheave pitch diameter is a minimum of 16 times the rope diameter on standard wire line sizes.

See yellow boxes below

Model 752 - Double Sheave										
WLL (t)	3		5		7.5		10		15	
Sheave O.D.	6.5"	165mm	8"	203mm	10"	254mm	12"	305mm	12"	305mm
Sheave Spacing Centerline (mm)	3.25" - 5" 82.6 - 127mm		4.5" - 6.5" 114 - 165mm		5.25" - 7.75" 133 - 203mm		6.5" - 10" 165 - 254mm		7.5" - 11" 191 - 279mm	
Pitch Diameter (mm)	5.95" 150 - 152mm		7.38" 183 - 191mm		9.25" 228 - 236mm		11" 273 - 282mm		11" 273 - 282mm	
Wire Line*										
1/4"	6.5mm									
5/16"	8mm									
3/8"	9-10mm									
7/16"	11mm									
1/2"	12-13mm									
9/16"	14mm									
5/8"	16mm									
3/4"	19mm									

Product Information

Easy to Reeve


- Removable housing allows block to be reeved without complete disassembly.

Simply remove the four bolts to have access to sheave grooves.




Product Information

- Hook & case assembly contains drilled and tapped hole in top of case for handling assistance during assembly.**
 - Especially helpful with larger size blocks.

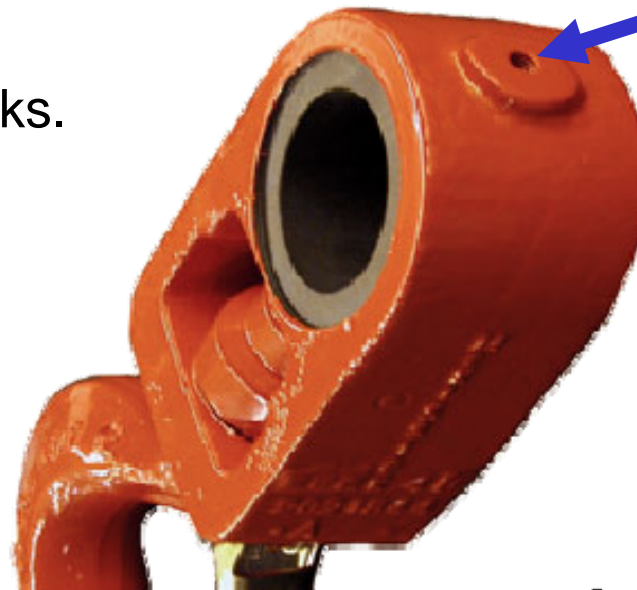

Options Available

- Flat top design provides ability to attach optional “anti two-block” device.

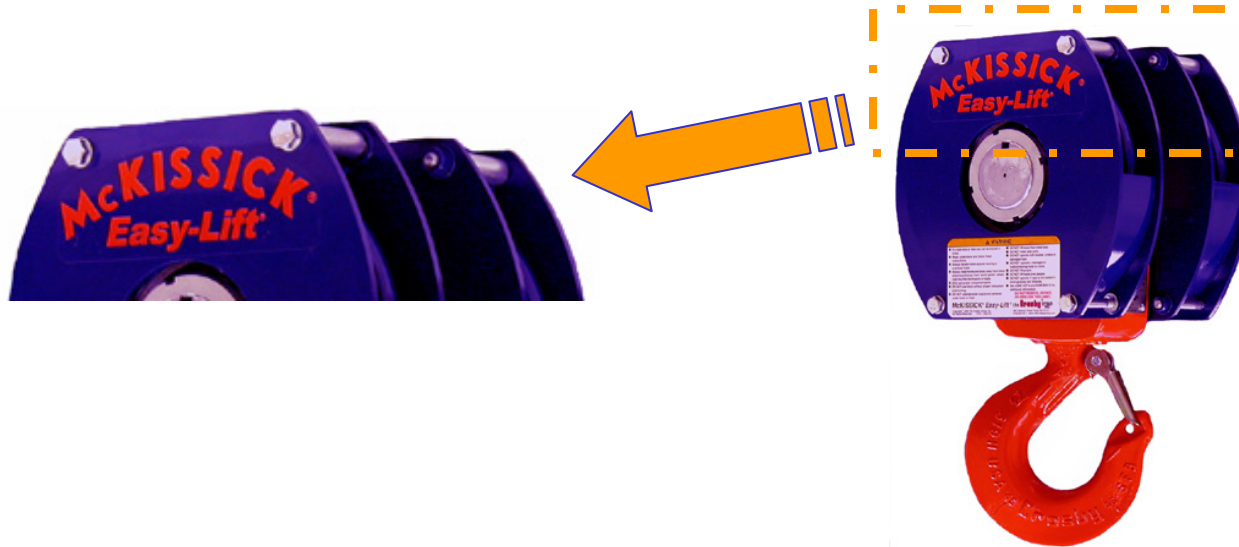

Benefits

- Modular design provides ability to assemble block in a short time period, thus providing you and your customer improved service.**
- Competitively priced**