

Purpose

To provide hoist ring with "forged bail" designed to be used in lashing applications.





MKThr100-2

Product Information

Wide range of capacities available

- UNC Threads 2,000 lbs. to 20,000 lbs.
- Metric Threads 900 kg. to 9,000 kg.

 The Working Load Limit and recommended torque value are permanently stamped into each washer.

Lond Rated





Product Information

RFID EQUIPPED

 Each hoist ring comes "factory equipped" with an RFID chip for immediate utilization with various inspection and asset management software.





Product Information

HR-100 features a forged alloy steel bail that provides benefits you have come to expect from Crosby "forged" components.

- More durable bail provides the increased toughness desired in potentially abusive filed conditions.
- Easily readable "Raised Lettering" showing the name Crosby or "CG" and PIC Code for traceability.
- Forged bail features larger throat opening than standard HR-125





Product Information

- **Contract Design Factor of 5 to 1**
- 180° pivot action at full capacity.
- 100% individually Proof Tested to 2-1/2 times the Working Load Limit with certification.





Product Information

 Each product has a Product Identification Code (PIC) for material traceability along with a Working Load Limit and the name Crosby or "CG" stamped into "load bearing components".






Product Application

Like standard Crosby hoist rings, the HR-100 must be installed to recommended torque with torque wrench making sure mounting surface meets the load (work piece) surface.





Product Application

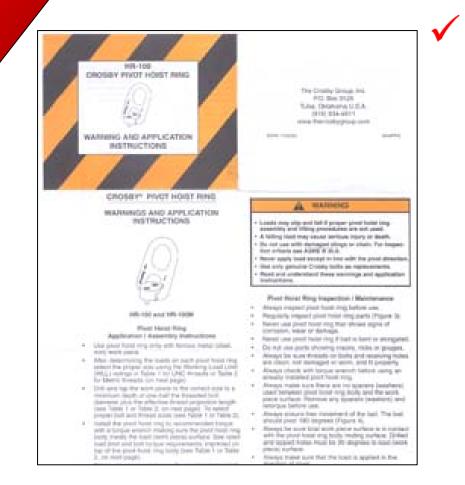

 Detailed warning and application instructions are included with each hoist ring.





MKThr100-9